



INSTALLATION GUIDE

CTS TURBO MK7/7.5 MK8 GOLF GTI/R REAR WIPER DELETE
CTS-HW-286



WHAT IS INCLUDED

1. CTSTurbo Rear Wiper Delete



NOTES

Always make sure the car is safe to work on. Do not work on a hot motor.

STEP 1

Open the trunk.

Remove the plastic trim shown.
No tools required, just carefully pull it off.



STEP 2


Now remove the side trim.



STEP 3

There are 4 Torx bolts you need to remove indicated on the image.

You can now remove the panel.

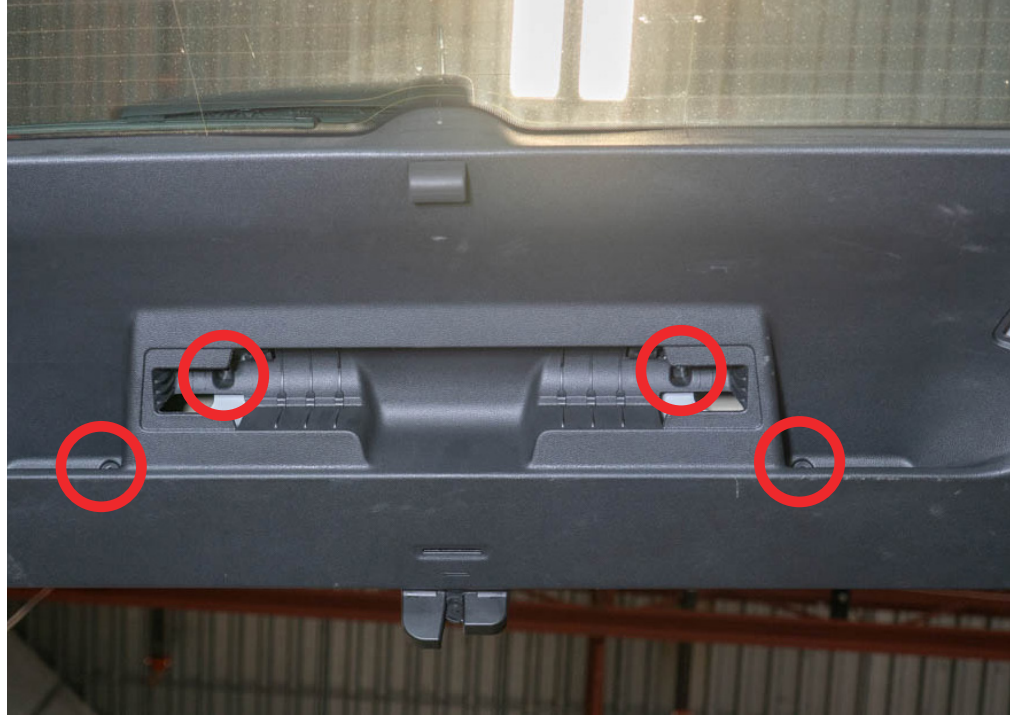

STEP 4

Sometimes when you remove the panel there are little metal clips that can be left behind.

Just have a quick look and reinstall them if needed.



STEP 5

Remove the 13mm nut from the wiper arm.



STEP 6


We highly recommend using a puller tool to remove the wiper arm to avoid damaging the splines and glass.



STEP 7


Remove the electrical connector from the wiper motor.

Rotate the 3 white dials indicated and remove the motor.

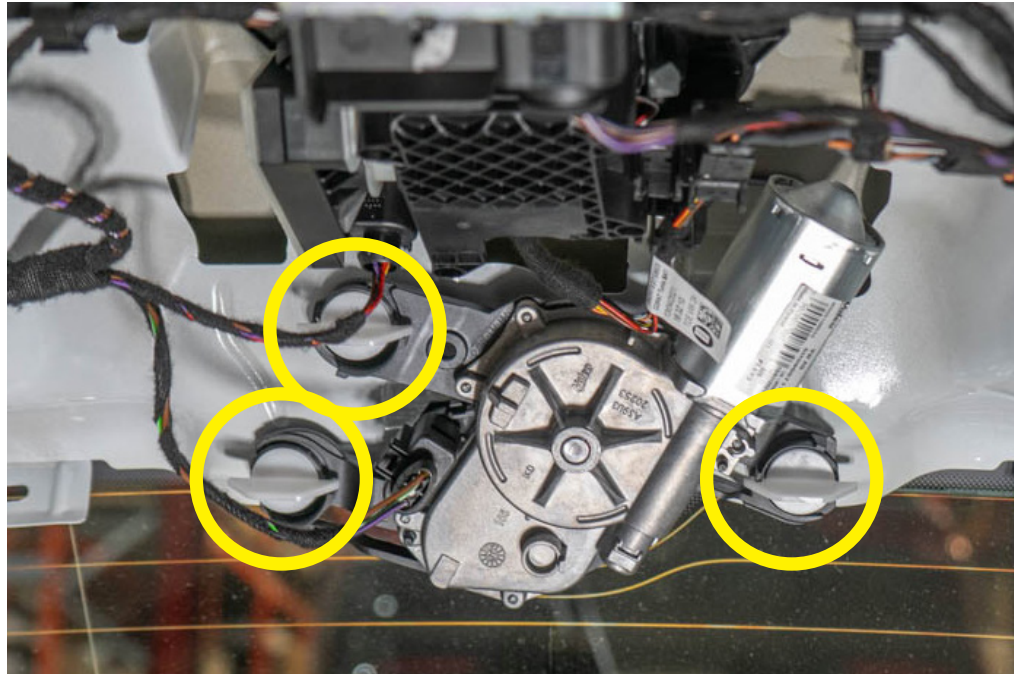

STEP 8

Install the inner CTS wiper delete part. Ensure the oring is seated correctly.

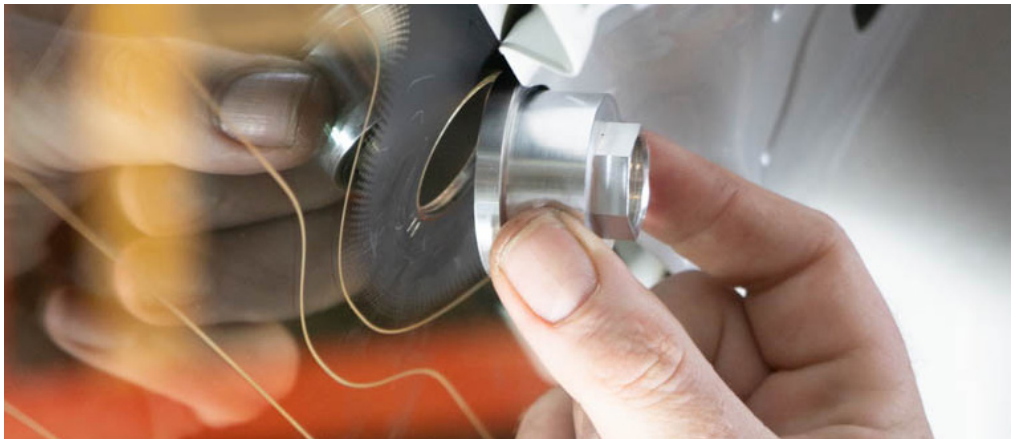

STEP 9

While holding the inner part in place you can begin to thread the outside CTS wiper delete.

Once you are close to tight you can adjust the logo until it is square.

DO NOT OVERTIGHTEN. HAND TIGHTEN ONLY.



STEP 10

Reassemble the plastic covers and panels and you are done!

